



# One bath, lots of options.

E-comfort instantaneous water heaters are suitable for almost every bathroom. Whether on the wall at eye level, inconspicuously in the lower wall area for even shorter pipe runs, hidden in the bathroom furniture or behind an inspection flap – everywhere the appliances conveniently supply hand basins, showers and even the bathtub.



Wall niche




With this installation the desired temperature can be easily set.

DSX Touch Spot




Bathroom furniture

The device is hidden but always easily accessible and controllable via app or radio remote control.

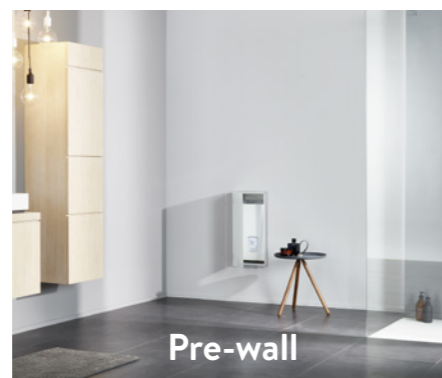

Pre-wall

The device is integrated in the pre-wall with an inspection flap and can be operated via app or with the radio remote control.

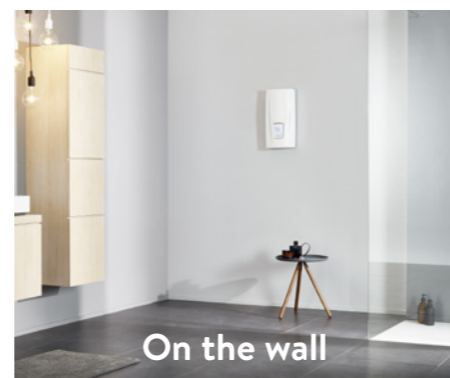

On the wall

The E-comfort instantaneous water heater is installed open at eye level, is easy to operate and thus becomes a design element in the bathroom.

# New features

## New compact design

- > New CLAGE design line (simpler, flatter, whiter, clearer, sharper)
- > Fresh and sophisticated product design
- > Real-glass display unit (DSX Touch, DEX Next)
- > Touch display with velour-chrome display frame (DSX Touch)
- > High-contrast e-paper display (DEX Next)
- > Sensor button and colour LEDs (DCX Next)



## User-friendly interface

- > Enhanced UX (user experience) concept via touch interaction and innovative visualisation
- > Temperature control accurate to 0.5 °C
- > Control via “Smart Control” app
- > FX3 remote control via Bluetooth (DSX Touch, DEX Next)



## Efficient monitoring

- > Modern instantaneous water heaters have monitoring functions to always keep an eye on consumption!
- > Touch display and Smart Control app simplify commissioning and maintenance, as well as making it quick and easy to see the individual consumption values of multiple users.



Operating mode

Dispensing mode

Main menu

Statistics



## Smart interaction

- > The electric instantaneous water heaters in the house can be operated intuitively by voice control system, tablet or smartphone via WiFi (DSX Touch) and Bluetooth 5.0
- > Integrated home server (DSX Touch)
- > Hot water always in the right quantity also by voice control

## Easy installation



- > Same wall mount and dimensions as with last product generation
- > Top area and bottom area installation due to easy electrical installation (up and below)
- > IP25 water protection class
- > Transverse installation possible
- > Solar-compatible (inlet temperature ≤ 70 °C)



## Next level technology

- > Newly developed & optimized heating cartridge
- > Optimized flow characteristics
- > Electronic safety system with air bubble detection
- > Suitable for inlet water volume starting at 1.5 l/min
- > Advanced electronics with MPS®
- > New integrated safety pressure limiter and safety temperature limiter
- > Optimized actuator and electronic water stop function (DSX Touch)
- > Efficient bare wire heating system IES® reduces lime scale deposits & provides an extended service life

# New hot water comfort



## DSX Touch Premium

- > Fully electronically controlled premium instant water heater with real glass touch display, remote and voice control for convenient and economical hot water supply to one or more tap(s)
- > Always precise temperatures between 20°C and 60°C due to TWIN TEMPERATURE Control TTC® and SERVOTRONIC® dynamic flow rate control
- > Extensive energy and consumption monitoring
- > Suitable for water saving taps
- > Electronic safety system with air bubble detection, temperature and pressure cut-off as well as water stop function
- > Function for thermal treatment with 70°C for more hygiene
- > With the Multiple Power System MPS®, the maximum power rating is set at the time of installation:  
DSX Touch: 18, 21, 24 or 27kW / 400V



Smart Control  
-ready



Solar-ready,  
suitable for  
reheating



Bluetooth  
remote control  
included



integrated  
Wi-Fi  
function



## DEX Next Comfort

- > Electronically controlled comfort instant water heater with E-Paper display and sensor keys for convenient and economical hot water supply to one or more tap(s)
- > Precise temperatures between 20°C and 60°C due to TWIN TEMPERATURE Control TTC® up to the full rated power output
- > Energy and consumption monitoring
- > Suitable for water saving taps
- > With the Multiple Power System MPS®, the maximum power rating is set at the time of installation:  
DEX12 Next: 8.8 or 11.5kW / 230V  
DEX Next: 18, 21, 24 or 27kW / 400V



Smart Control  
-ready  
(optional)



Solar-ready,  
suitable for  
reheating



Bluetooth  
remote control  
(optional)



## DCX Next Standard

- > Electronically controlled standard instant water heater with simple operation
- > One-button operation for fast and easy five-level temperature selection: 35°C, 38°C, 42°C, 48°C and 55°C
- > TWIN TEMPERATURE Control TTC® for consistent temperature control up to the full rated power output
- > Suitable for water saving taps
- > With the Multiple Power System MPS®, the maximum power rating is set at the time of installation:  
DCX13 Next: 11 or 13.5kW / 400V  
DCX Next: 18, 21, 24 or 27kW / 400V

## Contact us:

CLAGE GmbH  
Pirrolweg 1 – 5  
21337 Lüneburg · Germany  
Phone: +49 4131 8901-38  
Fax: +49 4131 83 200  
export@clage.de · [www.clage.com](http://www.clage.com)